



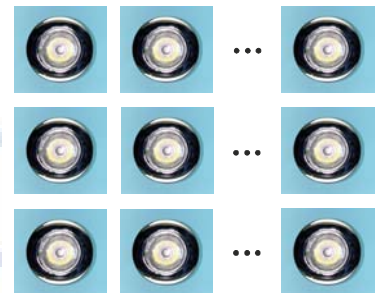

LEDmat® 3-Channel Power LED Driver, 1-10V, 0 - 10V / Poti,
Abmessungen / dimensions: 99 x 89 x 41mm

| | |
|-----------------|-----------------------------|
| Farbe / colour | Best.-Nr. / Order No. |
| | 12 - 24V-, 350/700mA |
| schwarz / black | 21 310 |



Total No. of LED's @ Vf=3,2v
- 24v: 3 x 6 = 18
- 12v: 3 x 3 = 9

Control Options

1-10V



Electronic Potentiometer, size 60 x 60mm
- matching
+ Berker, #21280
+ inprojal, #21290
specify finish for cover & knob

0-10V



control voltage input
- universal, for scene setting

Pot Meter



panel mount with knob

- switch plate style
- change-over capability

- #20201
- #20202 sealed
- #20203 matching + HELLA + SWF

- matching
- Berker 60 x 60 mm
 - inprojal 60 x 60 mm
 - JUNG, Gira, Berker 81 x 81 mm
- #2132x - #2133x - #2134x
- specify finish for cover & knob

max. 18 LED'S

| LED-Stromklasse (mA) | Bordspannung (V) | | | |
|----------------------|---|------|------|------|
| | 12 | | 24 | |
| | Anzahl der Power-LED's (bei Spannungsfall pro LED von ca. 3,2V) | | | |
| | min. | max. | min. | max. |
| 350 | 3x1 | 3x3 | 3x1 | 3x6 |
| 700 | 3x1 | 3x6 | 3x1 | 3x6 |

| LED-current-type (mA) | Board Voltage (V) | | | |
|-----------------------|---|------|------|------|
| | 12 | | 24 | |
| | Number of Power-LED's (@ voltage drop per LED approx. 3,2V) | | | |
| | min. | max. | min. | max. |
| 350 | 3x1 | 3x3 | 3x1 | 3x6 |
| 700 | 3x1 | 3x6 | 3x1 | 3x6 |

pros_012 rev. 10/20

Änderungen vorbehalten / changes reserved