




LEDmat® 3-Channel Power LED Driver, Constant Current



LEDmat® 3-Channel Power LED Driver, 1-10V, 0 - 10V / Poti,
Abmessungen / dimensions: 99 x 89 x 41mm

Farbe / colour	Best.-Nr. / Order No.
	12 - 24V-, 350/700mA
schwarz / black	21 310

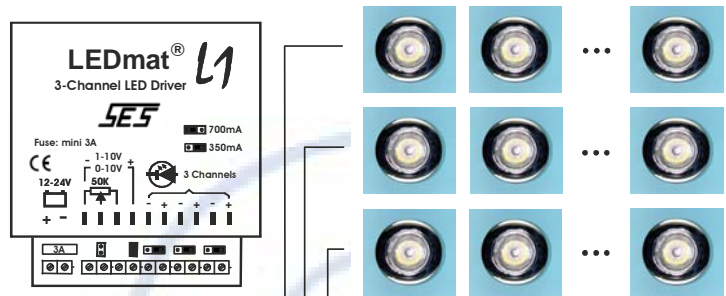

Total No. of LED's @ Vf=3,2v
- 24v: 3 x 6 = 18
- 12v: 3 x 3 = 9

Control Options

1-10V



Electronic Potentiometer, size 60 x 60mm
- matching
+ Berker, #21280
+ inprojal, #21290
specify finish for cover & knob

0-10V



control voltage input
- universal, for scene setting

Pot Meter



panel mount with knob

- switch plate style
- change-over capability

- #20201
- #20202 sealed
- #20203 matching + HELLA + SWF

- matching
- Berker 60 x 60 mm
 - inprojal 60 x 60 mm
 - JUNG, Gira, Berker 81 x 81 mm
- #2132x - #2133x - #2134x
- specify finish for cover & knob

max. 18 LED'S

LED-Strom-klasse (mA)	Bordspannung (V)			
	12		24	
	Anzahl der Power-LED's (bei Spannungsfall pro LED von ca. 3,2V)			
	min.	max.	min.	max.
350	3x1	3x3	3x1	3x6
700	3x1	3x6	3x1	3x6

LED-current-type (mA)	Board Voltage (V)			
	12		24	
	Number of Power-LED's (@ voltage drop per LED approx. 3,2V)			
	min.	max.	min.	max.
350	3x1	3x3	3x1	3x6
700	3x1	3x6	3x1	3x6

pros_012 rev. 03/16

Änderungen vorbehalten / changes reserved

